


CODE: AWO152PU v.1.0
NAME: 7/40/PAR/EMPTY

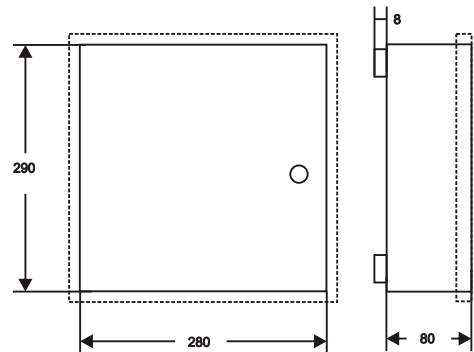

DESTINATION

PARADOX:

1)(728 ULT, E55, E65, SP4000, 5500, 6000, 7000, EV048, 192, MG5000, 5050, PS17, ACM12) + ZX8 (2xZX4, APR3- ADM2,APR3-HUB2, PGM4)

TECHNICAL DATA

Dimensions:	internal: W=280, H=290, D=80 external: W1=285, H1=295, D1=88mm [mm, +/-2]
Weight net/gross:	1,65kg / 1,80kg [+/-0,1kg]
Battery space:	7Ah/12V Sealed Lead Acid (SLA)
Transformer:	without transformer- can be mounted in the casing: TRP20, TRP40, TRZ20, TRZ40, EI20, EI40.
Operating environment:	class II , -10°C+ 40°C
Material description:	sheet steel DC01, thickness: 0,7mm, protection anticorrosion, color: RAL 9003
Destination:	indoor
Tamper protection:	1 x microswitch: opening, 0,5A@50V/DC max. NC- contacts
Closing:	screwed x 4
Notes:	optional: lockable, distance from wall (mounting surface) - 8mm, easy door removal,
Certification, declaration:	RoHS