



2MP IP INDOOR DOMECAMERA

*Lens 4mm / IR LED 2pcs.

G4S-NCDi




GENERAL FEATURES

- H.264 / MJPEG Network Camera
- Dual Stream
- Motion Triggered Alarm(@ V2.0)
- ONVIF Compliant(@ V2.0)
- SONY CMOS Sensor IMX-036
- 2D/3D DNR. (Depends on CODEC configuration)
- Contrast Enhancement (Local Exposure)
- DPC(Defective Pixel Correction) on the fly
- True Day & Night
- Analog Hybrid Output(Installation Only)

SPECIFICATIONS

Image Sensor	1/2.8" Sony IMX-036 CMOS Sensor
Pixel	2.1 Mega Pixel
Resolution	1920x1080 / 1280x1024 / 1024x768 / 1280 x 720 / 640x480 / 320x240 / 704x480/576(4CIF), 352x240/288(CIF)
Frame Rate	1 fps ~ 25 fps / 1 fps ~ 30 fps
Compression	H.264 / MJPEG
Min. Illumination	Color: 0.63 lux(F3.5, 50IRE) B/W: 0 lux(IR LED ON)
Os	Linux
Web Browser	Internet Explorer 7.0 or above, Firefox, Chrome, Smart Phone/PAD@V2.0
IP	Static /Dynamic
DDNS Server	Support
Protocol	IPv4, HTTP, HTTPS(?), SMTP(@V2.0), UPnP, DNS, RTSP, DDNS, RTP, TCP, UDP, RTCP, DHCP, ARP, IGMP, ICMP, NTP(@ V2.0) / IPv6(@ V3.0)
S/N ratio	48.8 dB or more
OSD	Multi Language GUI support
Bit Rate	512Kbps~10,000Kbps
Function	BLC, MOTION DETECTION, E-SHUTTER, SLOW SHUTTER, PRIVACY ZONE, MIRROR(H/V/R)
Day & Night	Removable IR Cut Filter
Ethernet	Rj-45/10base-T/100base-T
F/W Upgrade	By Internet Or Local
Factory Reset	Factory Default Set Button Installed
Operation Temp.	-10 ~ 50°C
Preservation Temp.	-20 ~ 60°C
Input Voltage	POE (IEEE802.3AF)
Current Consumption	70mA / 3.3W(IR OFF), 100mA / 4.8W(IR ON)
Weight	Approx. 260g

DIMENSIONS

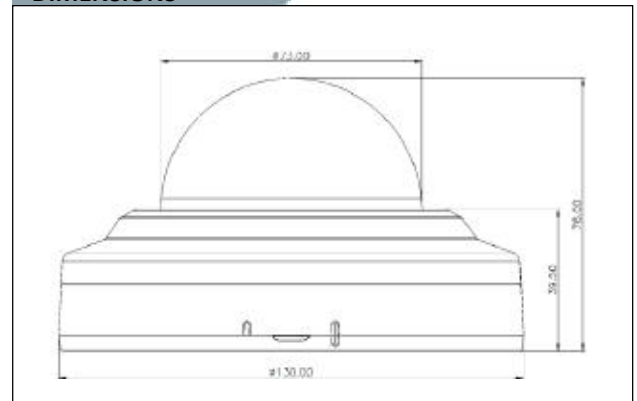

ADDRESS

