


Superior Transmitter Fibra

Wired module to integrate one third-party device into an Ajax system

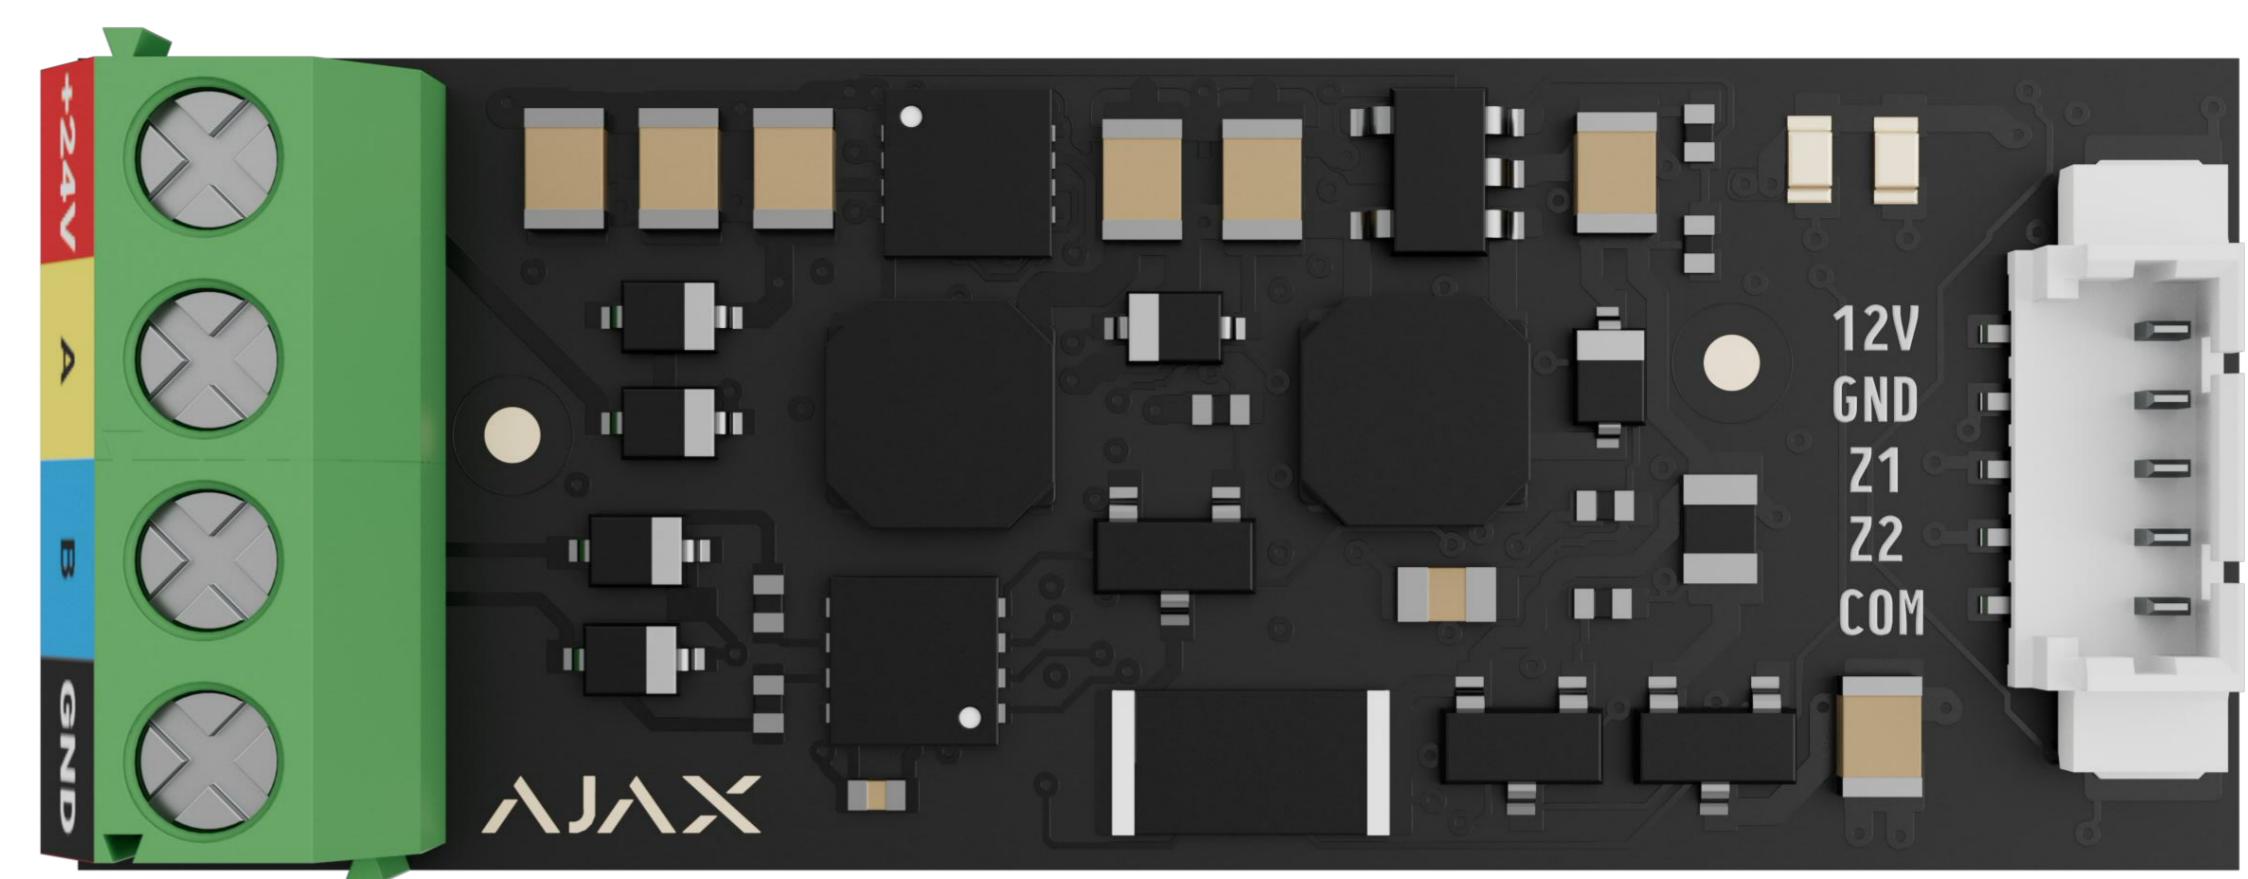

This is the device of the Superior product line.

Only accredited Ajax Systems partners can sell, install, and administer Superior products.

3
GRADE
EN 50131

PD 6662
2017

INCERT


Tiny gear to boost regular into Ajax

Superior Transmitter Fibra is a wired integration module that connects third-party wired devices to an Ajax system. It serves two key purposes: upgrading outdated detectors with modern capabilities and integrating devices not yet available in the Ajax portfolio. Compact enough to fit inside any detector, Superior Transmitter Fibra enables connected devices to report one of over ten event types, supports remote configuration, and unlocks automation features.



Control and configuration via Ajax apps

- Detailed event and alarm notifications for monitoring companies and users
- Remote and on-site configuration and testing
- Numerous event types for connected devices
- Optional automation scenarios triggered by a connected device alarm




Maximum compatibility

- Support for NC, NO, EOL, 2EOL, and 3EOL connection types, as well as pulse and bistable operating modes
- Dedicated roller shutter mode and KeyArm feature
- One 12 V=, 50 mA power output for a connected device
- Two inputs for flexible connection options



Sabotage protection

- Superior Transmitter Fibra authentication to prevent spoofing
- Protection against third-party device sabotage thanks to EOL connection support
- Short circuit protection



Fibra communication technology

- Up to 2,000 m (6,550 ft) of wired communication with a hub or Fibra line extension module
- Data encryption during transmission between Superior Transmitter Fibra and an Ajax hub
- Regular polling to display the current state of the integration module

Quick installation and setup

- Pairing with a hub via automatic line scanning or QR code
- Remote control and configuration via Ajax apps
- Installation inside a connected third-party detector thanks to the module's compact size
- Automatic EOL resistance measuring for time-efficient installation



Compatibility	Compliance with standards	Communication with a hub	Features
<p>For detailed information, scan the QR code or follow the link: ajax.systems/tools/devices-compatibility/?models=TR.Y.F</p>	<p>EN 50131 (Grade 3) PD 6662:2017 INCERT</p>	<p>Fibra communication technology</p> <p>Wired connection U/UTP cat.5 4x2x0.51 mm (24 AWG) cable, copper conductor 4x0.22 mm² signal cable, copper conductor</p> <p>Communication range up to 2,000 m up to 6,550 ft With U/UTP cat.5 4x2x0.51 mm (24 AWG) cable</p>	<p>Number of zones 2</p> <p>Connection types NC, NO, EOL, 2EOL, 3EOL Dedicated mode for roller shutters and KeyArm feature</p> <p>Operating modes pulse, bistable</p> <p>Types of events over 10 event types</p> <p>Cable length up to 3 m up to 10 ft When using a signal cable with a 0.22 mm² copper-clad aluminum conductor</p>
<p>Power supply</p> <p>Fibra line 7–30 V^{dc}, 185 mW (no load) / 1224 mW (with load) The module is powered by the hub.</p> <p>Output to the connected wired device 10.5–15 V^{dc}, up to 50 mA (total maximum current consumption) One power supply line from Superior Transmitter Fibra.</p>	<p>Installation</p> <p>Operating temperature -10 °C to +40 °C 14 °F to 104 °F</p> <p>Operating humidity up to 75%</p> <p>Protection class IP40</p>	<p>Board</p> <p>Operating temperature range from -25 °C to +50 °C from -13 °F to 122 °F</p> <p>Operating humidity up to 75%</p> <p>Dimensions 40 x 15 x 12 mm 1.57" x 0.59" x 0.47"</p>	<p>Complete set</p> <p>Superior Transmitter Fibra Accessory 5-pin cable Quick start guide</p>



For detailed information, scan the QR code or follow the link:
ajax.systems/support/devices/superior-transmitter-fibra/

support@ajax.systems
 @AjaxSystemsSupport_Bot
 ajax.systems